

# SOLARFOX® SF-300 SERIES (GENERATION 2023) - TECHNICAL DATA



Product description	SF-300 24"	SF-300 32"	SF-300 43"	SF-300 50"	SF-300 55"	SF-300 65"	SF-300 75"
LED-Screen	Samsung	Samsung	Samsung	Samsung	Samsung	Samsung	Samsung
Article no.	2030524	2030532	2030543	2030550	2030555	2030565	2060575
Diagonal measurement	61 cm (24")	81 cm (32")	109 cm (43")	126 cm (50")	140 cm (55")	164 cm (65")	191 cm (75")
Dim. (LxDxH) with wallmount	53.9 x 3.9 x 32.2 cm	72.5 x 8.9 x 42 cm	96.7 x 10.3 x 55.7 cm	112.1 x 10.1 x 64.4 cm	123.5 x 10.1 x 70.7 cm	145.4 x 10.1 x 83.1 cm	168.1 x 10.4 x 96 cm
Weight	3.6 kg	6.7 kg	10 kg	13.4 kg	18.1 kg	24.9 kg	38.3 kg
Colour	Black	Black	Black	Black	Black	Black	Black
Technology	IPS/LED	Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU
Resolution	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
Contrast	1000:1	5000:1	4000:1	4000:1	4000:1	4000:1	4000:1
Brightness	250 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>	350 cd/m <sup>2</sup>
Viewing angle	178 degrees	178 degrees	178 degrees	178 degrees	178 degrees	178 degrees	178 degrees
Operating time	16/7	24/7	16/7	16/7	16/7	16/7	16/7
Display format	1080p (FullHD)	1080p (FullHD)	4K/UHD	4K/UHD	4K/UHD	4K/UHD	4K/UHD
Aspect ratio of the image	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Video interface	HDMI	HDMI	HDMI	HDMI	HDMI	HDMI	HDMI
Other Interfaces	1x HDMI, RJ 45 Ethernet (LAN), WiFi	2x HDMI, RJ 45 Ethernet (LAN), WiFi	2x HDMI, RJ 45 Ethernet (LAN), WiFi	2x HDMI, RJ 45 Ethernet (LAN), WiFi	2x HDMI, RJ 45 Ethernet (LAN), WiFi	2x HDMI, RJ 45 Ethernet (LAN), WiFi	2x HDMI, RJ 45 Ethernet (LAN), WiFi
Time switch (switching on/off)	no timer	individual day timer	individual day timer	individual day timer	individual day timer	individual day timer	individual day timer
TV tuner	no tuner	no tuner	no tuner	no tuner	no tuner	no tuner	no tuner
Speaker system	without speakers	speaker	speaker	speaker	speaker	speaker	speaker
Speaker output	Yes, jack	ARC (HDMI 1), 3,5 mm	Stereo mini jack	Stereo mini jack	Stereo mini jack	Stereo mini jack	Stereo mini jack
USB port	Yes, 2	Yes, 2	Yes, 2	Yes, 2	Yes, 2	Yes, 2	Yes, 2
Remote control	not available	Remote control	Remote control	Remote control	Remote control	Remote control	Remote control
Power supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
Consumption (typical)	24 W	47 W	82 W	94 W	99 W	127 W	164 W
Consumption (standby)	0.3 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W
Energy efficiency class	F	B	G	G	G	G	G
Manufacturer's warranty	3-year warranty	3-year warranty	3-year warranty	3-year warranty	3-year warranty	3-year warranty	3-year warranty
Packaging (L x D x H)	64 x 15 x 40.7 cm	81.5 x 13 x 49.9 cm	109.5 x 15.1 x 67.6 cm	126.9 x 15.2 x 78.4 cm	140.2 x 16.3 x 85.8 cm	161.1 x 18.5 x 97.3 cm	187.1 x 22.3 x 112.7 cm
Package weight	9.4 kg	13.3 kg	17.2 kg	23.9 kg	28.9 kg	38.6 kg	54.3 kg


## SOLARFOX® SF-300 SERIES (GENERATION 2023) - TECHNICAL DATA



The SF-300 series is designed for indoor installation and sets itself apart through robust hardware and a large range of functions. The displays can be operated up to 24 hours daily or turned on and off via a time switch function. The displays also support animations and video files.

- LED display
- Built-in control computer SC-2000 with software
- 15° tilting wall mount
- Cable and accessories
- Individual content and design
- Internet connection (LAN, WIFI, 3G with external router)
- Online Management

Please see further product information at: [www.solar-fox.com](http://www.solar-fox.com) → Service → Download

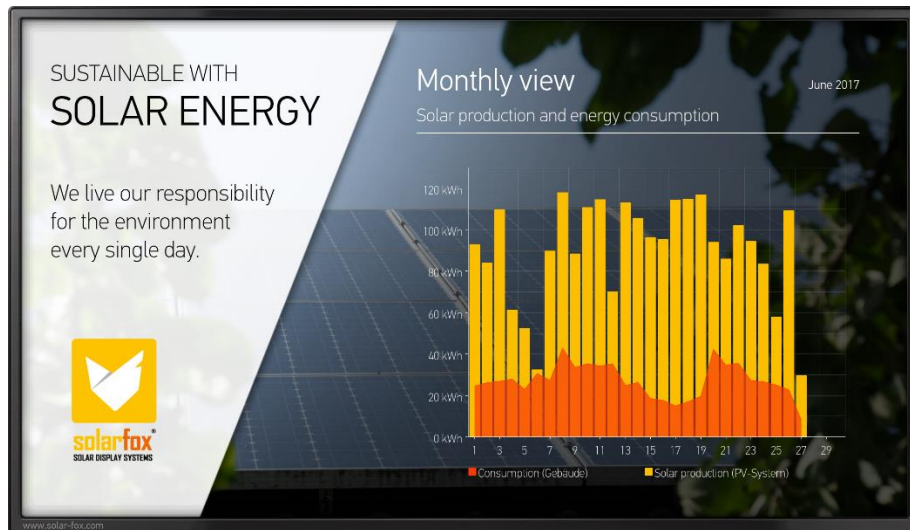

Solarfox® SF-300 Series